


Tabella appacchettamenti table of stack heights

HL mm		HS mm	HT mm		HP mm
da-from	a-to		da-from	a-to	
520	635	230	750	865	210
640	680	230	870	910	210
685	755	230	915	985	210
760	845	230	990	1075	210
850	925	230	1080	1155	210
930	995	240	1170	1235	211
1000	1070	249	1249	1319	220
1075	1155	259	1334	1414	230
1160	1245	268	1428	1513	239
1250	1330	278	1528	1608	249
1335	1415	288	1623	1703	259
1420	1500	298	1718	1798	269
1505	1585	305	1810	1890	276
1590	1675	315	1905	1990	286
1680	1760	325	2005	2085	296
1765	1845	335	2100	2180	306
1850	1930	345	2195	2275	316
1935	2015	355	2290	2370	326
2020	2105	365	2385	2470	336
2110	2190	375	2485	2565	346
2195	2275	385	2580	2660	356
2280	2360	395	2675	2755	366
2365	2445	401	2766	2846	372
2450	2535	411	2861	2946	382
2540	2620	421	2961	3041	392
2625	2705	431	3056	3136	402
2710	2790	441	3151	3231	412
2795	2875	450	3245	3325	421
2880	2965	460	3340	3425	431
2970	3050	470	3440	3520	441
3055	3135	479	3534	3614	450
3140	3220	489	3629	3709	460
3225	3305	497	3722	3802	468
3310	3395	510	3820	3905	481
3400	3480	520	3920	4000	491

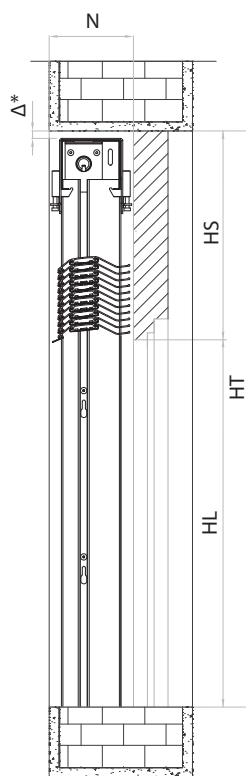


Δ* valore già integrato in HS è lo spazio necessario per il premontaggio guide ed eventuali staffe per veletta.

Δ* value already included in HS, which is the required space to allow rail guides and eventual brackets for front cover panels to be pre-assembled.


Tabella dimensioni table of dimensions

LUME	Guida in luce Side rail guides	Guida ad incasso Embedded rail guides
	mm	mm
BL MINIMA	675	565
BL MASSIMA	3000	2890
HT MINIMA	750	750
HT MASSIMA	4020	4020
SUP.MASSIMA	9 MQ	9 MQ
N MINIMA	120	120

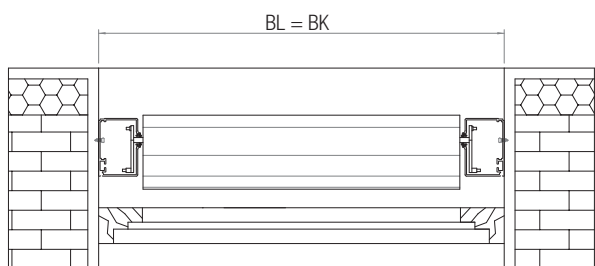

Sezione orizzontale guide in luce

Horizontal section for side rail guides

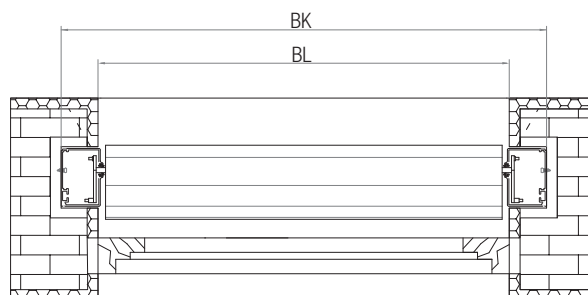

Sezione orizzontale guide incassate

Horizontal section for embedded rail guides